

Key Features

- Full-duplex line rate AES encryption for 10Mbps, FastEthernet (100Mbps), and Gigabit Ethernet (GbE) networks
- Standards-based authentication, digital certificates, and key management
- Bump-in-the-wire design for easy installation into existing network environments
- Designed to international Common Criteria and U.S. Government FIPS security standards
- Part of world's first complete family of High-Speed Encryption devices for network security interface independence
- Central remote configuration, monitoring, and management through SafeEnterprise Security Management Center (SMC)

SafeEnterprise Ethernet Encryptor

For 10Mbps, Fast Ethernet, and Gigabit Ethernet



The cost of network communications bandwidth has decreased significantly in recent years. Enterprises are now able to link corporate and regional offices, server farms, data centers, and disaster recovery centers across floors or across continents with multi-megabit or even gigabit lines at a fraction of the cost they were paying before.


With more and more enterprises relying on high-speed communications to connect critical network infrastructures in support of business continuity, a single disruption or malicious attack against these services can cause businesses to lose millions of dollars while incurring significant legal liability.

As long as critical data must traverse multiple carriers and multiple network nodes before arriving at its final destination, CIOs must ensure that sensitive information is protected from compromise by using the strongest encryption schemes available, without compromising network performance.


Metro Ethernet has emerged as the new transport technology designed to provide greater bandwidth efficiency, and ease of installation and use for end users and network operators. The SafeNet SafeEnterprise™ Ethernet Encryptor is a high-performance Layer 2 security appliance designed to protect 10Mbps and high-speed Ethernet networks at speeds up to 100Mbps and 1Gbps. With seamless end-to-end integration, the SafeEnterprise Ethernet Encryptor delivers instant protection across the network.

Like all SafeNet high-speed security appliances, the SafeEnterprise Ethernet Encryptor is managed by the SafeEnterprise Security Management Center (SMC), a robust, Java™-based policy management software application with secure, flexible, and transparent SNMP-based control and monitoring capabilities. The SMC provides the ability to define integrated security policies that can be centrally and remotely distributed across multiple devices.

PRIVATE NETWORK

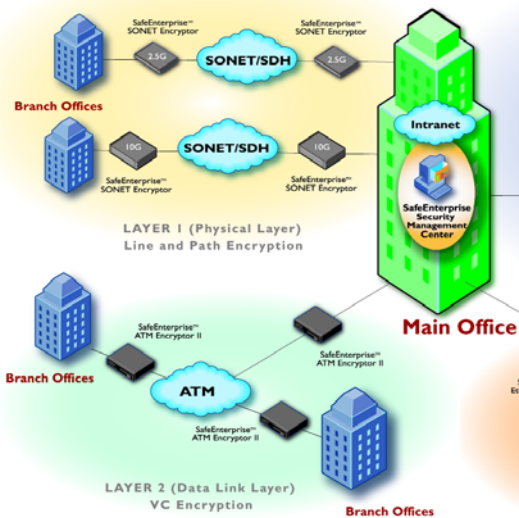

PUBLIC NETWORK

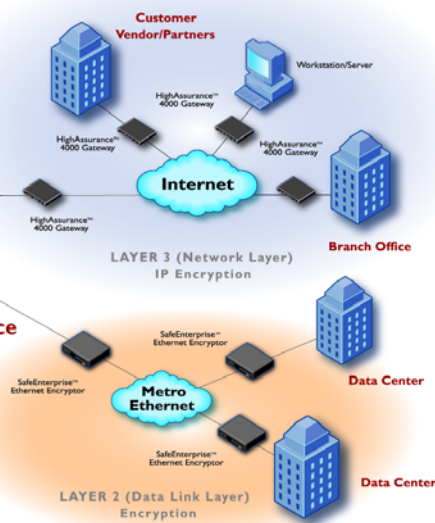

Performance

- Full-duplex operation at line speed with no packet loss for all modes of operation
- Cut-through data streaming for low latency vs. store and forward architectures
- Key change without interruption

Network

- Ethernet II, IEEE 802.3
- Jumbo frame support
- VLAN, MPLS transparency

Interfaces

- SFP fiber modules (Multi-mode: 850nm, Single-mode: 1310nm)
- SFP electrical modules

Cryptography

- AES algorithm - 256-bit key
- CFB providing automatic crypto resynchronization

Audit

- Alarms
- Interface status
- Event Log
- Audit Log
- Date and time of secure connection
- Configuration changes

Key Management

- RSA public key
- Automatic session key update
- Authentication using X.509 certificates

Accreditations

- Common Criteria EAL 4 in process
- FIPS PUB 140-2, Level 3 in process

Corporate: 4690 Millennium Drive, Belcamp, Maryland 21017 USA
Tel: **+1 410.931.7500** or 800.533.3958 email: info@safenet-inc.com

www.safenet-inc.com

Brazil +55 11 4208 7700
Canada +1 613.723.5077
China +86 10 885 19191
Finland +358 20 500 7800
France +33 1 41 43 29 00
Germany +49 18 03 72 46 26 9
Hong Kong +852.3157.7111
India +91 11 26917538

Japan +81 45 640 5733
Korea +82 31 705 8212
Mexico +52 55 5575 1441
Netherlands +31 73 658 1900
Singapore +65 6297 6196
Taiwan +886 2 27353736
UK +44 1276 608 000
U.S. (Massachusetts)
+1 978.539.4800

U.S. (Minnesota)
+1 952.890.6850
U.S. (New Jersey)
+1 201.333.3400
U.S. (Virginia) +1 703.279.4500
U.S. (Irvine, California)
+1 949.450.7300
U.S. (San Jose, California)
+1 408.452.7651

U.S. (Torrance, California)
+1 310.533.8100

Distributors and resellers
located worldwide.

Technical Specifications

SMC Management

- SNMP v3
- Ethernet 10/100, RJ-45
- RS-232 local console
- In-band management

LCD Status Indicator

- Local interface
- Network interface
- Temperature
- Battery level
- System operation
- Secure status
- Power
- LEDs for interface Tx/Rx

Physical Security

- Tamper-proof storage of encryption keys and user passwords
- Tamper-resistant metal case

Environmental

- 5° to 40°C operating temperature
- 0 to 80% RH @ 40°C operating temperature
- 0 to 1980m operating altitude AMSL

Electrical

- 90VAC to 250VAC, 110W maximum, 47-63Hz
- -48VDC, 40W maximum

Mechanical

- Height - 41mm (1RU)
- Width - 435mm (19" rack mountable)
- Depth - 285mm
- Weight - 4.5kg